


CS3000T 3kW Induction Table-top Product Specifications

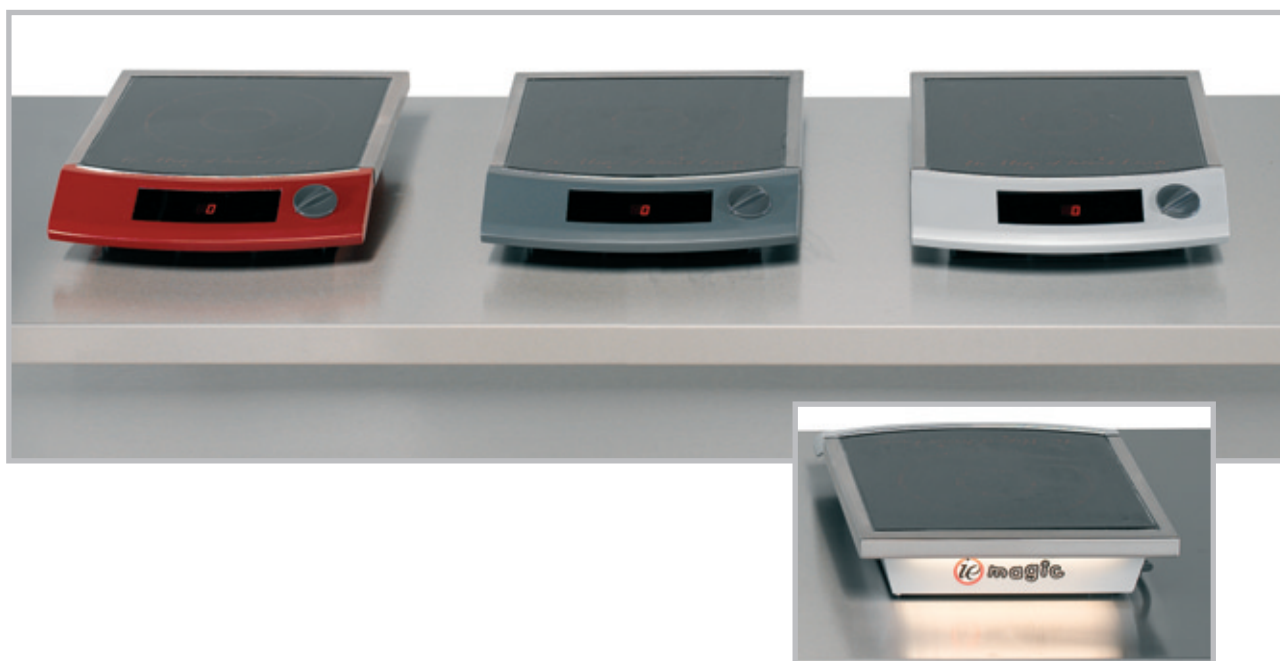

Maximum Power	3.0kW
Electrical Supply	230V AC 50HZ 13-amp single phase supply
Cord & Plug	Cord length 1.8m Moulded 13-amp plug fitted (UK) Appropriate plug for each export market
Weight	10kg
Dimensions (mm)	W: 380 L: 505 H: 90
Construction	Ceran top, powder-coated stainless steel case, powder coated aluminium front panel
Depth of Field	Up to 30mm
Safety Features	Pan detection; boil-dry protection; overheat prevention; clean filter warning
User Interface	Display panel: Clean filter warning; No Pan Present warning; Glass hot warning; Shutdown
Controls	Ergonomically designed knob with precise settings of 1 through 99
Cooling Clearance	Front only required
Rear Panel	Illuminated rear logo
Standard Options	Choice of three case colours; silver, charcoal or burgundy
Bespoke Options	Case colour - minimum quantity 50 Ceran top design - minimum quantity 50 Rear logo - minimum quantity 20
Warranty	2 years parts and labour, excluding case, Ceran top and rear light source
CE	Approved

Induced Energy Limited operates a continuous programme of product development and improvement. Product specifications may therefore be subject to change.